



**BCL Ceramics**

*Quality in Every Square*

# PRODUCT CATALOGUE

SEPTEMBER EDITION 2023



## About Company

---

BCL Ceramic Industries Ltd. is a new concern of BCL Group which is a concern of TMSS. BCL has started its journey since 2005. BCL Group is a diversified business entity. It has successfully completed 17 years of its operations. BCL Ceramic Ind. Ltd. is located in Sujabad, Bogura District, Bangladesh

The core philosophy of the company is to create a brand that is a sound mix of innovations, excellence, and creativity. With the aspiration to make it large, the company created the State-of-the-art technology and machinery from world famous Italian brands facilitated to ensure the European standard tiles. As a modernized venture, it integrates Research and Development, Production, Marketing sales and Services together

BCL Ceramics is fully automated factory and production facilities make sure that every process follows the highest level of accuracy. The range of tiles includes Homogeneous Floor, Glazed Polish, Porcelain, Wall Tiles, and Decor Tiles in a variety of designs and shades to ornament every decor with HD printing.

# 60X


# 60E



CRYSTAL  
DIAMOND  
POLISHED



BCL 6610

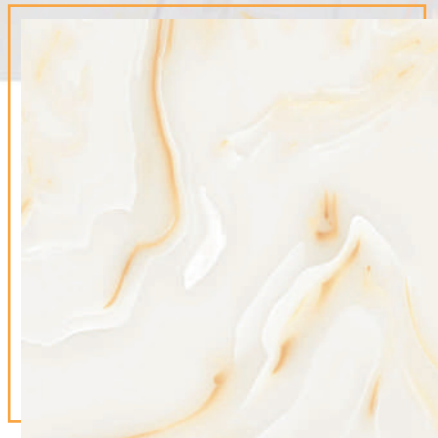

60X60 CM

MOSCATO CREAM



CRYSTAL  
DIAMOND  
POLISHED



WORLD BEST  
TECHNOLOGY



MOST DURABLE



BEST QC



BCL 6611



60X60 CM

CARRARA WHITE



WORLD BEST TECHNOLOGY



MOST DURABLE



BEST QC



BCL 6612



60X60 CM

SOFT FIBER



WORLD BEST TECHNOLOGY



MOST DURABLE



BEST QC



BCL 6613



60X60 CM


CRYSTAL ONYX



WORLD BEST TECHNOLOGY MOST DURABLE BEST QC



BCL 6614

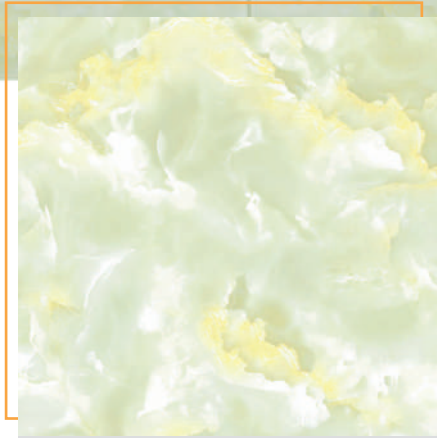

60X60 CM

FOREST GREEN



WORLD BEST TECHNOLOGY



MOST DURABLE




BEST QC





BCL 6615

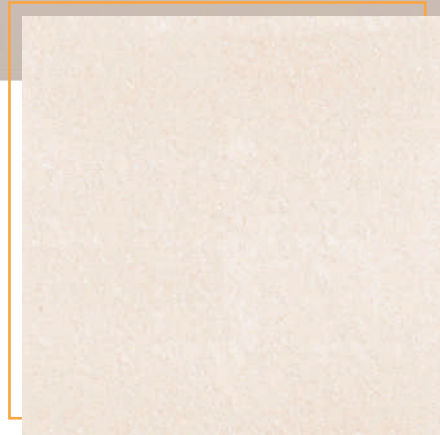

60X60 CM


SILICA BEIGE



 WORLD BEST TECHNOLOGY  MOST DURABLE  BEST QC



BCL 6616

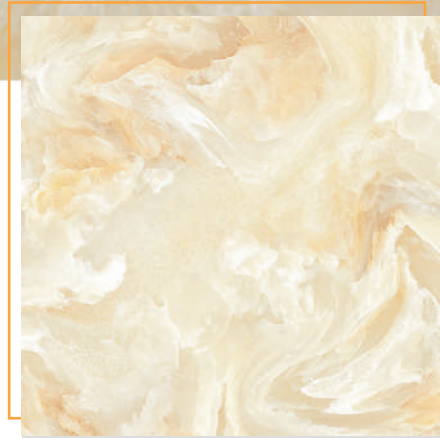

60X60 CM

CREMA MARFIL



WORLD BEST TECHNOLOGY




MOST DURABLE



BEST QC



BCL 6617

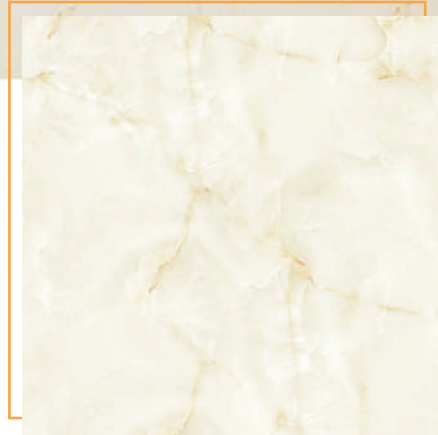


60X60 CM

CREMA ONYX



BCL 6618

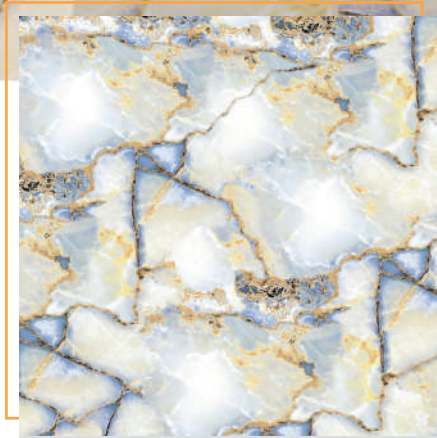

60X60 CM

SEA STONE



CRYSTAL  
DIAMOND  
POLISHED



WORLD BEST  
TECHNOLOGY



MOST DURABLE



BEST QC



BCL 6619



60X60 CM

WHITE WOOD



WORLD BEST  
TECHNOLOGY




MOST DURABLE




BEST QC

# HEAVY TRAFFIC

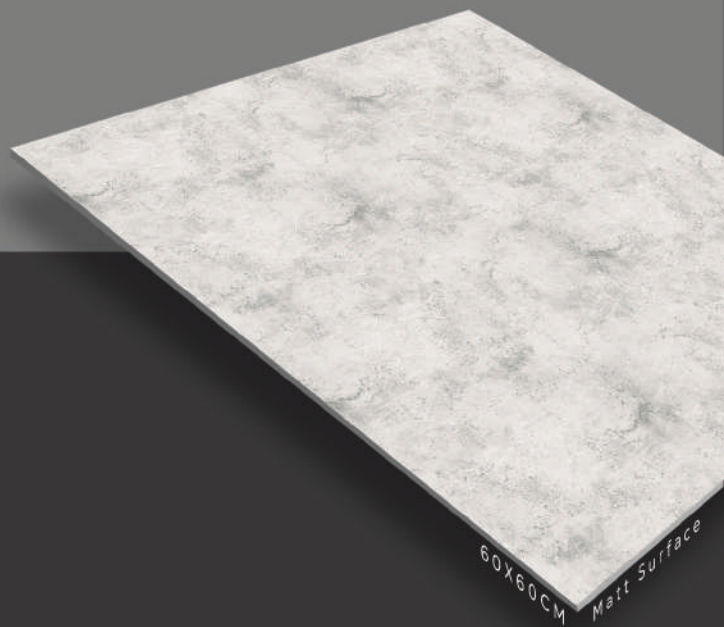

BCL: 6600

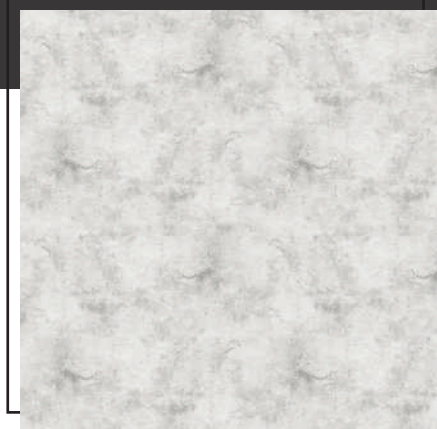

HEAVY TRAFFIC



SCRATCH RESISTANT



ANTI-SLIP



TRIPLE COATED

**40X**

40E

HIGH GLOSSY



BCL 4451



BCL 4452




BCL 4453



BCL 4454





BCL 4456



BCL 4457



BCL 4458



BCL 4459



WORLD BEST TECHNOLOGY




MOST DURABLE



BEST QC



BCL 4460




BCL 4462

**40X**

40E

HOMOGENEOUS

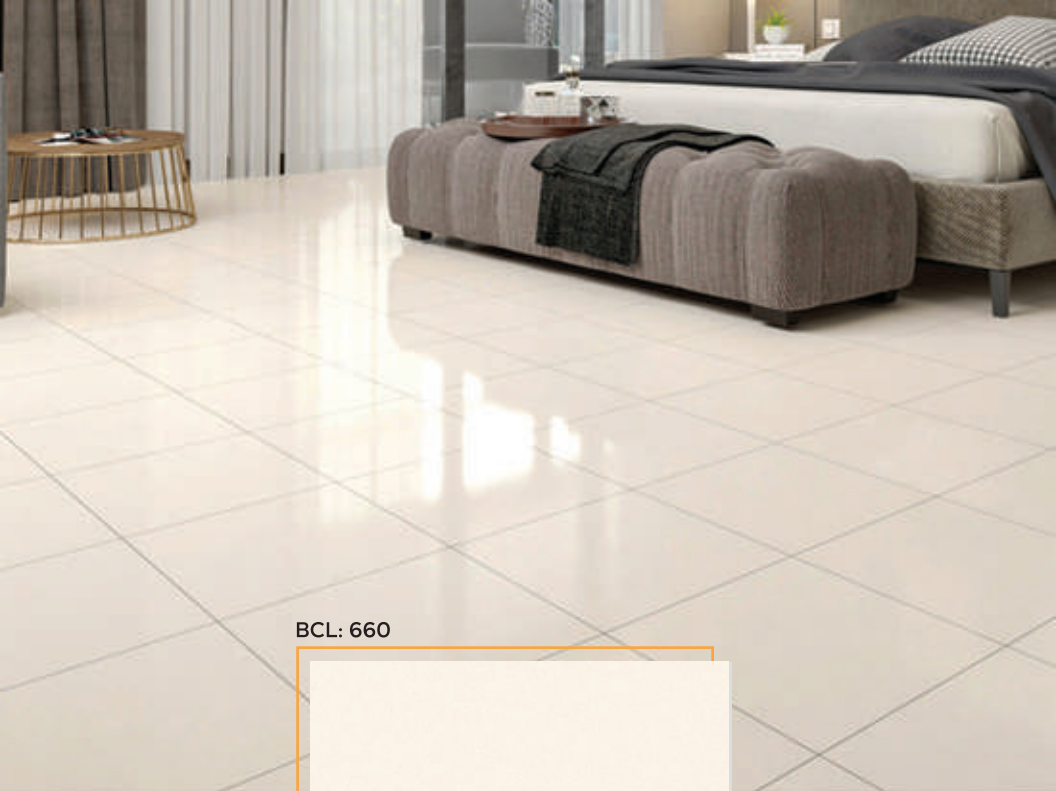


BCL: 660



60X60 CM

HOMOGENEOUS




BCL 440



BCL 441



BCL 442



BCL 443



WORLD BEST TECHNOLOGY




MOST DURABLE



BEST QC


30X30 CM HOMOGENEOUS




BCL 330



BCL 331



BCL 332



BCL 333

30X30 CM STAIR HOMOGENEOUS



BCL STP 330




BCL STP 331




BCL STP 332


30X30 CM HEAVY TRAFFIC HOMOGENEOUS



BCL 360 HT



BCL 362 HT



BCL 364 HT



BCL 361 HT



BCL 363 HT



BCL 365 HT

**30X**

60E


PREMIUM WALL



BCL.3667-L

BCL.3667-HL1

BCL.3667-D

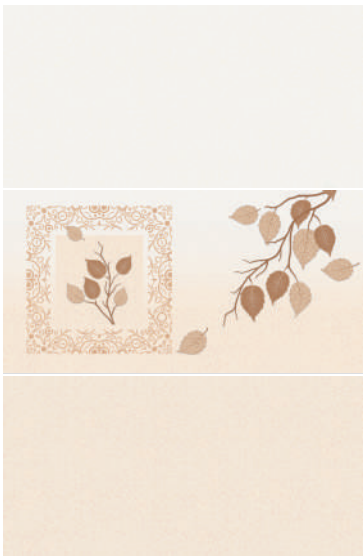

BCL.3667-L

BCL.3667-HL2

BCL.3667-D



WORLD BEST TECHNOLOGY



MOST DURABLE



BEST QC



LOW WATER ABSORPTION

BCL 3668-L

BCL 3668-HL1


BCL 3668-D



BCL 3668-L

BCL 3668-HL2

BCL 3668-D

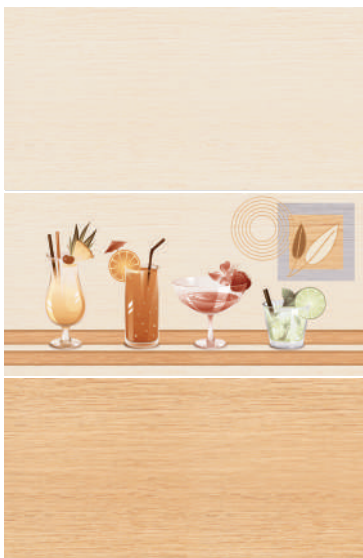

BCL 3669-L

BCL 3669-HL1

BCL 3669-D



BCL 3669-L

BCL 3669-HL2

BCL 3669-D




30X  
30CM  
MATCHING FLOOR



BCL 3321 MT



BCL 3316 MT



BCL 3318 MT



WORLD BEST TECHNOLOGY



MOST DURABLE



BEST QC



LOW WATER ABSORPTION



BCL 3670-L



BCL 3670-HL1



BCL 3670-D



BCL 3670-L




BCL 3670-HL2



BCL 3670-D




BCL 3671-L

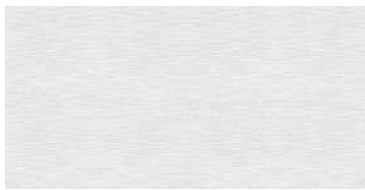

BCL 3671-HL1



BCL 3671-D

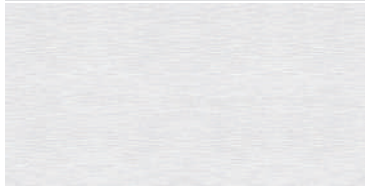


BCL 3671-L



BCL 3671-HL2




BCL 3671-D

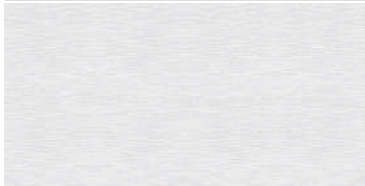

30X  
30CE

MATCHING FLOOR



BCL 3319 MT



BCL 3320 MT



WORLD BEST TECHNOLOGY



MOST DURABLE



BEST QC




LOW WATER ABSORPTION



BCL 3663-L

BCL 3663-HL2

BCL 3663-D

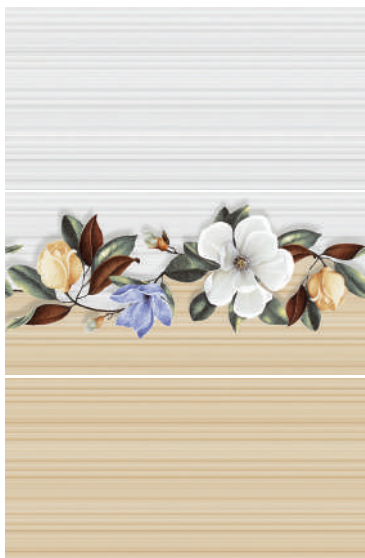

BCL 3663-L

BCL 3663-HL1

BCL 3663-D



WORLD BEST TECHNOLOGY



MOST DURABLE



BEST QC




LOW WATER ABSORPTION


BCL 3661-L



BCL 3661-HL1

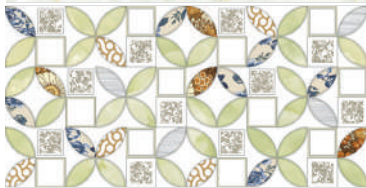

BCL 3661-D

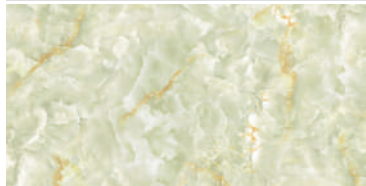

BCL 3661-L




BCL 3661-HL2



BCL 3661-D




BCL 3661-L

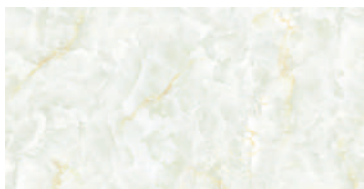

BCL 3661-HL3



BCL 3661-D

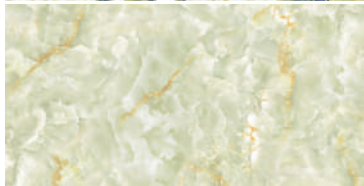

BCL 3672-L



BCL 3672-HL1



BCL 3672-D



30X  
30CM

MATCHING FLOOR



BCL 3311 MT



BCL 3312 MT



BCL 3317 MT



WORLD BEST TECHNOLOGY



MOST DURABLE



BEST QC



LOW WATER ABSORPTION

BCL 3672-L

BCL 3672-HL2

BCL 3672-D



BCL 3664-L

BCL 3664-HL1

BCL 3664-D



BCL 3664-L

BCL 3664-HL2

BCL 3664-D



BCL 3665-L

BCL 3665-HL1

BCL 3665-D



30X  
30E

MATCHING FLOOR



BCL 3314 MT



BCL 3315 MT



BCL 3313 MT



WORLD BEST TECHNOLOGY



MOST DURABLE



BEST QC



LOW WATER ABSORPTION

20X  
30E

PREMIUM WALL



BCL 2385-L



BCL 2385-HL1



BCL 2385-D



BCL 2385-L



BCL 2385-HL2



BCL 2385-D



WORLD BEST TECHNOLOGY




MOST DURABLE



BEST QC



LOW WATER ABSORPTION

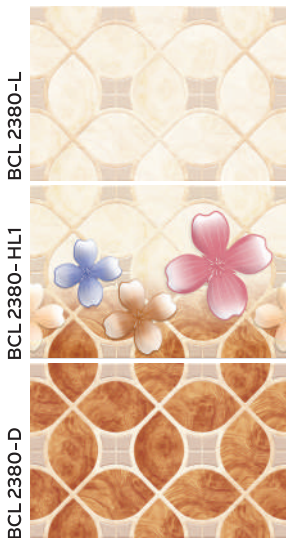

BCL 2380-L

BCL 2380-HL1

BCL 2380-D



BCL 2380-L

BCL 2380-HL2

BCL 2380-D



BCL 2346-L

BCL 2346-HL

BCL 2346-D



BCL 2351-L

BCL 2351-HL1

BCL 2351-D



BCL 2351-L

BCL 2351-HL2

BCL 2351-D



BCL 2353-L

BCL 2353-HL


BCL 2353-D






BCL 2383-L



BCL 2383-HL



BCL 2383-D

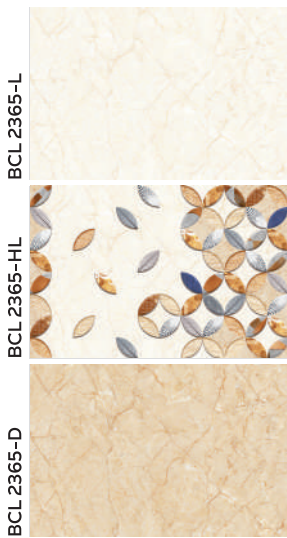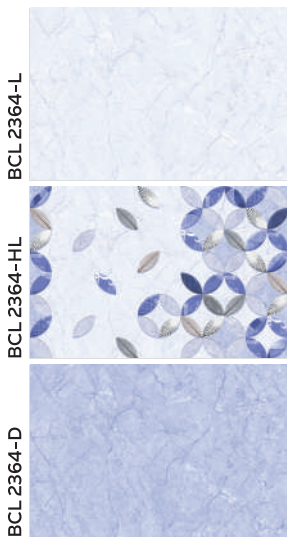

BCL 2386-L

BCL 2386-HL

BCL 2386-D



WORLD BEST TECHNOLOGY



MOST DURABLE



BEST QC



LOW WATER ABSORPTION



BCL 2381-L




BCL 2381-HL1



BCL 2381-D




BCL 2382-L



BCL 2382-HL1



BCL 2382-D



BCL 2384-L



BCL 2384-HL1



BCL 2384-D



BCL 2381-L




BCL 2381-HL2



BCL 2381-D




BCL 2382-L



BCL 2382-HL2



BCL 2382-D



BCL 2384-L



BCL 2384-HL2



BCL 2384-D



WORLD BEST TECHNOLOGY



MOST DURABLE



BEST QC




LOW WATER ABSORPTION


BCL 2341



BCL 2355



BCL 2356



BCL 2357



BCL 2358



BCL 2359



BCL 2361



BCL 2362-D



BCL 2362-HL



BCL 2362-L



# FLOOR TILES TECHNICAL SPECIFICATION

Test Description	Standard Method	BDS	BCL Ceramic Standard
Length & Width	BS EN ISO 10545-2	±0.5%	±0.25%
Thickness	BS EN ISO 10545-2	±0.5%	±0.2%
Straightness of Sides	BS EN ISO 10545-2	± 0.5%	±0.2%
Rectangularity	BS EN ISO 10545-2	± 0.5%	±0.4%
Surface flatness	BS EN ISO 10545-2	± 0.5%	± 0.2%
Water Absorption	BS EN ISO 10545-3	> 0.5%	> 0.10%
Modulus of Rupture	BS EN ISO 10545-4	> 35 N/mm <sup>2</sup>	> 40 N/mm <sup>2</sup>
Thermal Shock Resistance	BS EN ISO 10545-9	No Visible Defect	No Visible Defect
Crazing Resistance	BS EN ISO 10545-11	No Crazing	No Crazing
Resistance to Chemical Resistance	BS EN ISO 10545-13	No Visible Defect	No Visible Defect
	BS EN ISO 10545-14	Stains Removed	Stains Removed

# WALL TILES TECHNICAL SPECIFICATION

Test Description	Standard Method	BDS	BCL Ceramic Standard
Length & Width	BS EN ISO 10545-2	±0.5%	±0.4%
Thickness	BS EN ISO 10545-2	±0.5%	±0.35%
Straightness of Sides	BS EN ISO 10545-2	± 0.5%	±0.3%
Rectangularity	BS EN ISO 10545-2	±0.5%	±0.45%
Surface flatness	BS EN ISO 10545-2	± 0.5%	± 0.35%
Water Absorption	BS EN ISO 10545-3	> 10%	> 10%
Modulus of Rupture	BS EN ISO 10545-4	> 12 N/mm <sup>2</sup>	> 13.5 N/mm <sup>2</sup>
Thermal Shock Resistance	BS EN ISO 10545-9	No Visible Defect	No Visible Defect
Crazing Resistance	BS EN ISO 10545-11	No Crazing	No Crazing
Resistance to Chemical Resistance	BS EN ISO 10545-13	No Visible Defect	No Visible Defect
	BS EN ISO 10545-14	Stains Removed	Stains Removed


## টাইলস ব্যবহারের নির্দেশিকা

- প্রতিটি টাইলস এর নির্দিষ্ট কালার কোড থাকে, তাই এটি স্থাপনের পূর্বে নিশ্চিত হওয়া জরুরি যে, মেঝেতে অথবা দেয়ালে ব্যবহৃত সকল টাইলস একই কালার কোডের। যেমন মেঝের আয়তন ৩০০ স্কয়ার ফুট, এই ৩০০ স্কয়ার ফুট মেঝেতে একই কালার কোড এর টাইলস ব্যবহার করা উত্তম।
- টাইলস স্থাপনের সময় দুটি টাইলসের মাঝখানে অন্তর্জাতিক নিয়মানুযায়ী ৩ মি.মি. ব্যবধান রাখা দরকার।
- আপনার প্রতিষ্ঠানে যে পরিমাণ টাইলস লাগবে - সমস্ত টাইলস একবারে অর্ডার দিন, তাহলে কালার শেড পরিবর্তন হবে না।
- বাড়ি নির্মাণের ক্ষেত্রে অধিকাংশ সময় ঘরের অভ্যন্তরীণ কাঠ, বিদ্যুৎ এবং আসবাবপত্রের কাজ টাইলস স্থাপনের পর হয়ে থাকে। এ সকল কাজের সময় টাইলস এর উপর সতর্কতামূলক আচরণ ব্যবহার করা উচিত। কারণ অনর্ধরিত অবস্থায় টাইলস ক্ষতিগ্রস্ত হতে পারে।
- যথাযথ এবং সুদৃঢ় বন্ধনের জন্য টাইলসের উপর যত্নের সাথে কার্টের মুহুর / মুয়ুল এর সাহায্যে চাপ দেয়া উচিত, (এক্ষেত্রে লোহার হাতুড়ি অথবা ভারী বস্তুর ব্যবহার ক্ষতিকর)
- টাইলস এর সৌন্দর্য ও স্থায়িত্ব নির্ভর করে যত্নের উপর।

+88 01732 661122



ISO 9001:2015 Certified

 **Corporate Office:** Navana Zohura Square (4th Floor )  
28, Kazi Nazrul Islam Avenue, Banglamotor, Dhaka-1000

---

**Factory:** Dohopara, Sujabad, Sajahanpur, Bogura-5800

---

**Exclusive Display Center**

---

**Jatrabari :** 39/1 south Shayedabad, Doyagonj, Dhaka

---

**Khulna :** 18 khan jahan Ali Road, khulna

---

**Sherpur :** Jobeda Kutir, Khorompur, Sherpur